

# neo

BY PULSEEIGHT

## 4X4 VIDEO MATRIX KIT



**EXTEND 1080P  
UP TO 70M**



**EXTEND 4K  
UP TO 40M**



**4 HDMI  
INPUTS**



**4 HDBASET  
OUTPUTS**



**2 HDMI  
OUTPUTS  
(MIRROR)**



**CLOUD  
MONITORING**

### TECHNICAL SPECIFICATIONS

**SKU:** P8-HDBT-L-FFMS44-22-KIT

**HDMI Inputs:** 4

**Audio Outputs:** 0

**HDBaseT Outputs:** 4x HDBaseT Class B (lite)

**HDMI Outputs:** 2 Mirror HDMI®

**HDBaseT Recommended Cable:** Cat5e or higher

**Ethernet Passthrough:** No

**IR Control:** Bi-Directional

**HDMI-CEC Control:** Full

**Voice Control:** Yes - Alexa Skill

**Web Interface:** Yes + Android App available

**Monitoring:** Remote Monitoring Portal

**Automatic EDID Management:** Yes

**Third Party Control:** Yes - Drivers available

**ARC (Audio Return Channel):** No

**PoH:** Yes

**Encryption:** HDCP 1.4, HDCP 2.2 and HDCP 2.3

**Maximum Pixel Clock:** 340Mhz

**Maximum Bandwidth:** 10.2Gbps

**Maximum Video Resolution:** 4K@60Hz 4:2:0

**Colour Supported:** 4K: 8bit, 1080p: 12bit

**Third Party Drivers Available:** Control4, Crestron, Crestron Home, Elan, RTI, Savant and URC

**Power Consumption:** Max 2.5Amps

**Power Input:** 48V DC - 4pin DIN connector

**Power Rating:** 100-240V 4.0/2.0A 50/60Hz

**Material:** Brushed Aluminium (Anodised)

**Product Dimensions:** 44 x 4.3 x 14 cm - 1U (Matrix)

**Product Weight:** 2.05 kg (Matrix)

**Operating Temp Range:** 0 to +35°C (32 to +95°F)

**Storage Temp Range:** -20°C to 60°C (-4°F to 140°F)

**Humidity Range:** 5 to 90% RH (no condensation)

**Safety & Emissions:** UKCA, CE, FCC, RoHS


**Manufactured In:** Great Britain by Pulse-Eight

### KIT INCLUDES

neo:4 Chassis | 4 x neo:Lite PoH Receivers  
Rack Mounting Kit | 4 Button IR Remote  
Power Cord | Quick Start Guide  
Infrared Blaster Cable Pack



# CONCEPT WIRING DIAGRAM: neo:4

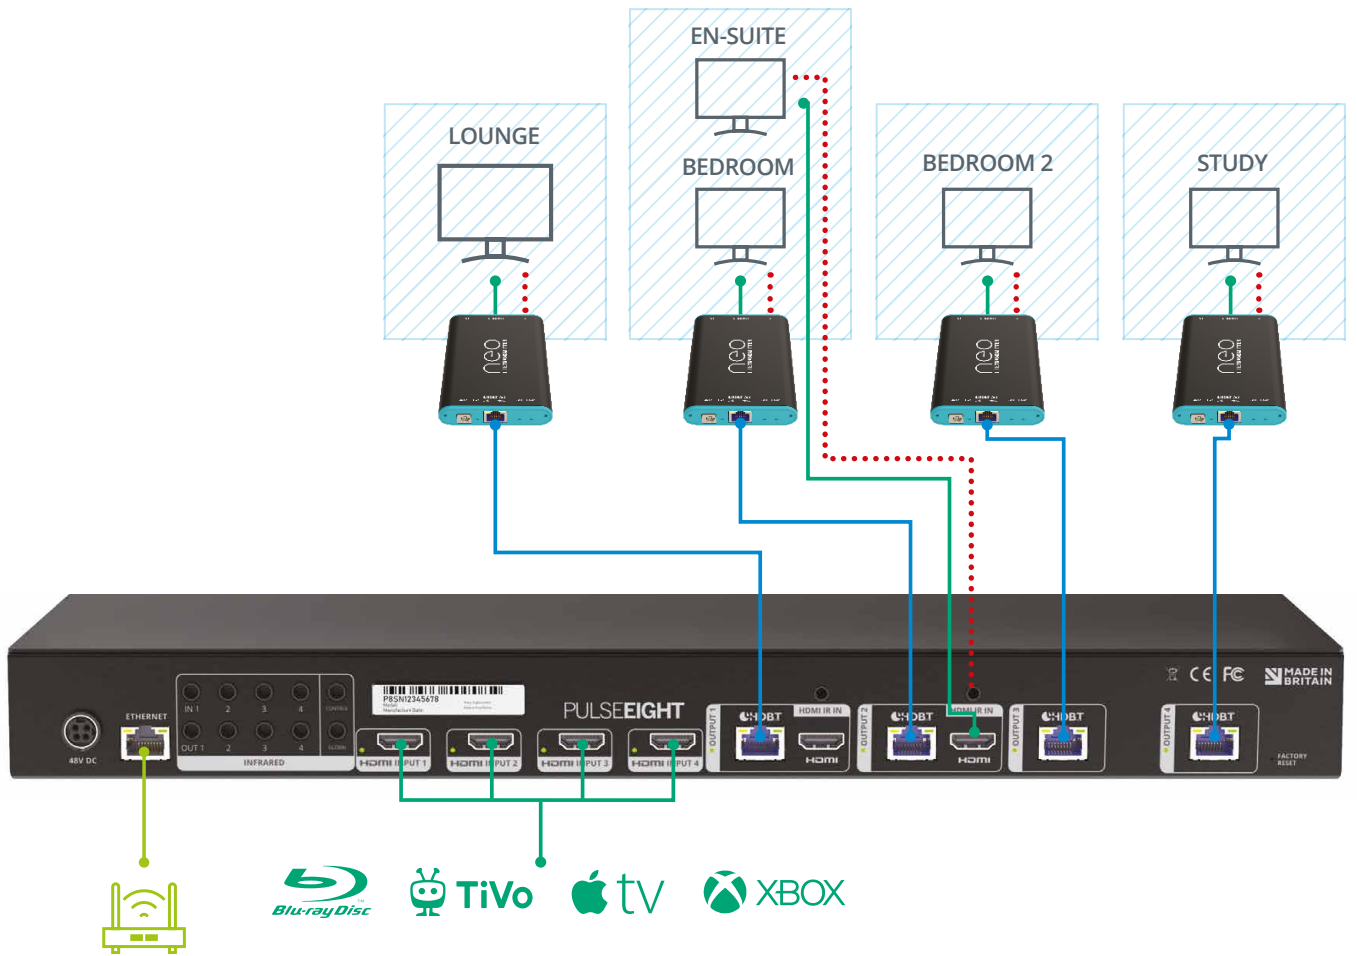

## LEGEND

- ..... Infrared
- HDBaseT
- Ethernet
- HDMI



## COMPATIBLE CONTROL SYSTEMS

