



Internal HDMI-CEC Adapter



Wiring Harness Modification Guide

P8-INTCECV2

SAFETY PRECAUTIONS

Please read all instructions before attempting to install or operate this equipment.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury.
- To prevent fire or shock hazard, do not expose the product to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Do not allow anything to rest on the cabling or allow any weight to be placed upon it.

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate, however, Pulse-Eight Limited assumes no responsibility for any inaccuracies that may be contained in this document. Pulse-Eight Limited also makes no commitment to update or to keep current the information contained in this document.

Pulse-Eight Limited reserves the right to make improvements to this document and/or product at any time and without notice.

Pulse-Eight Limited assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means (electronic, mechanical, magnetic, optical, chemical, manual, or otherwise) without express written permission and consent from Pulse-Eight Limited.

© Copyright 2013 Pulse-Eight Limited
All Rights Reserved.
Version 1.0 - December 2013


TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.


	Wire Colour	Current Postition	New Postition
HDMI CEC	Red	8	3
SMB_DATA	Purple	6	6
SMB_CLK	Blue	4	4
Ground	Black	2	2
Power_Button	White	7	n/a *
3.3 V Standby	Green	5	5
Key (no pin)	-	3	7
Recording LED	Yellow	1	1

* This wire needs to be manually connected to the Power Button pin on the standard pin header on your mainboard

CURRENT WIRE SETUP

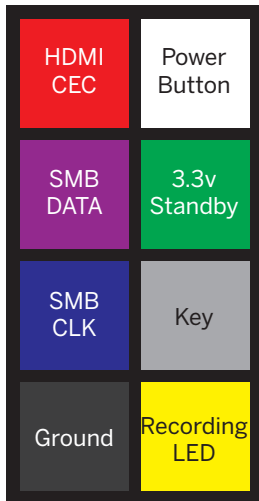

NEW WIRE SETUP

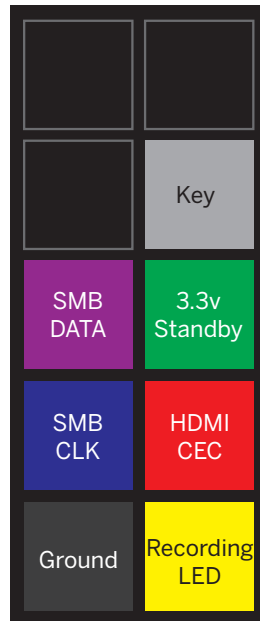



Pulse-Eight Limited
13 The Metro Centre | Peterborough | PE2 7UH | UK

T: +44(0)1733 404 940
E: sales@pulse-eight.com

www.pulse-eight.com